
- WITH LIFT AXLE UP REMAINING TWO AXLES OPERATE AS BEFORE.

— WITH LIFT AXLE DOWN IT WILL AT IN CONJUNCTION WITH REAR TWO SUSPENSIONS. AIR PRESSURE WILL BE THE SAME IN ALL THREE SUSPENSIONS AND AIR WILL TRANSFER BETWEEN UNITS.

	ITEM	PART NO.	QTY.	DESCRIPTION		
	1	10100	1	BRAKE PROTECTION VALVE		
7	2	10208	1	ELEC. SOLENOID VALVE "MACK"		
	3	10376-38	1	PILOT VALVE		
	4	17760-04	1	HEIGHT CONTROL VALVE		
	5	10602-01	1	PILOT VALVE		

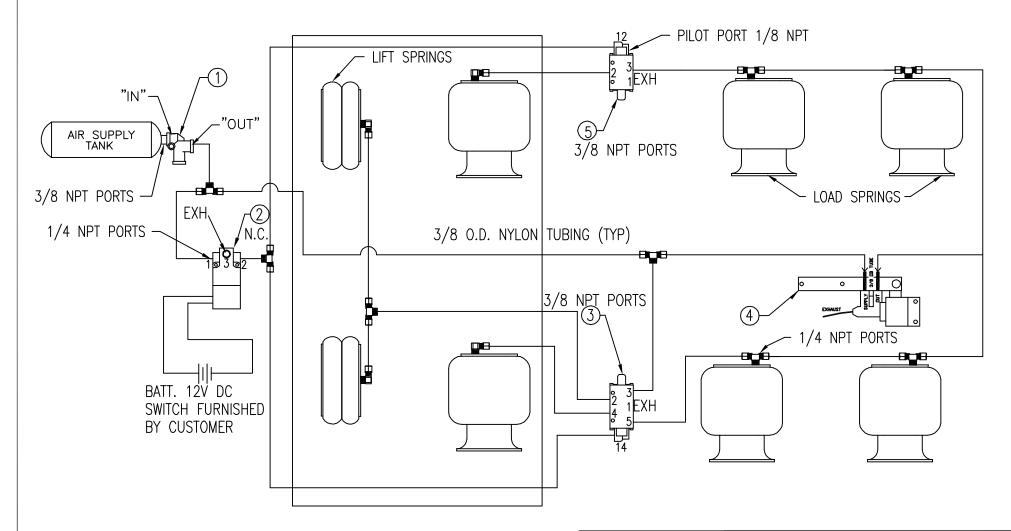

NOTES: ALL NYLON TUBING AND FITTINGS FURNISHED BY CUSTOMER.

PART PROPERTIES	TOLERANCES (EXCEPT AS NOTED)	WATSON & CHALIN MFG., INC.					
AREA —	DECIMAL ±	DESCRIPTION TRI—A)	XLE \	W/ F	RON	IT AXLE LIFT	
CUT LENGTH —	FRACTIONAL ±	SUSPENSION MODE	L	sćale NTS		PREVIOUS ASSEMBLY —	
WEIGHT —	ANGULAR ±	date 1/8/96	CHKD BY	drawn by CBD	size A	DRAWING NO. ACK-08-3	